



7th Step... Once you have the inside hook fastener tightened, you can hook up the outside cam fastener as shown in the above illustration.

Make sure the locking triangle is holding the cam in place...



8th Step... Once you have the chains installed, drive about ¼ Mile and check the chains. At this time install the bungee straps on the chains as shown in illustration below.



THINGS TO REMEMBER...

- Install the tire chains in pairs on the rear outside duals.
- Make sure your mud flaps are in place when using tire chains.
- Do not exceed 30 MPH while using tire chains.
- Check the lug nuts periodically since they have a tendency to loosen when using chains.
- If the chain breaks, repair it or remove it immediately. Do not operate with a broken tire chain.

July 2010

INSTALLATION PROCEDURES FOR TIRE CHAINS...




KANSAS
DEPARTMENT OF TRANSPORTATION

1st Step... Select a level parking area to install the chains. Use a wedge-shaped 4"x6" block to back the inside dual of the truck on. This will allow for easier installation of the tire chains.



2nd Step... Lay the chain out...

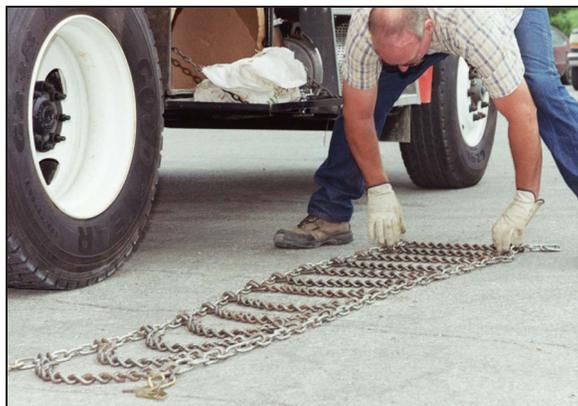



3rd Step... Inspect the chains for broken hooks or fasteners.



4th Step... Equal amounts of chain need to hang over each sidewall of the tire as shown above.

Equally Distribute Chain With Cam Fastener On The Outside Sidewall

5th Step... The cam fastener needs to be located on the outside sidewall of the tire as in illustration below.

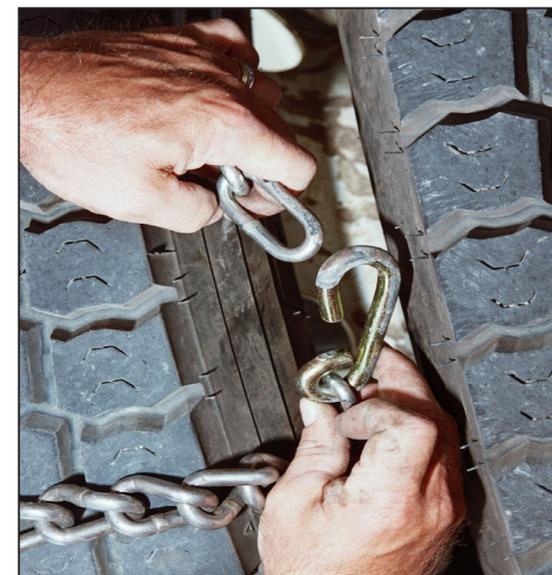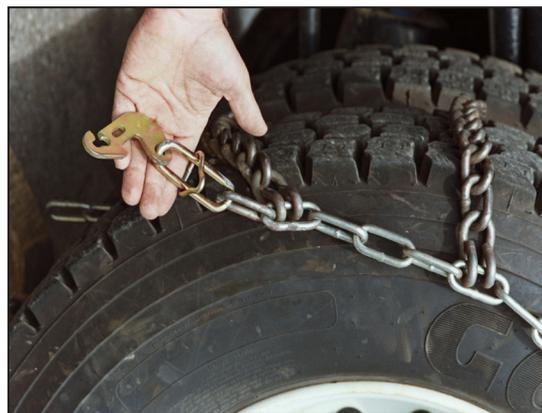

6th Step... Hook the inside hook fastener first, and get this hook fastener as tight as you can. You may have to readjust once you hook the chain fastener on the outside of the tires.

